

Aarhus School of Architecture // Design School Kolding // Royal Danish Academy

Going low energy - full scale

Sattrup, Peter Andreas; Strømmand-Andersen, Jakob Bjørn

Publication date:
2011

Document Version:
Publisher's PDF, also known as Version of record

[Link to publication](#)

Citation for published version (APA):

Sattrup, P. A., & Strømmand-Andersen, J. B. (2011). *Going low energy - full scale*. Poster session presented at Velux Daylight Symposium 2011, Lausanne, Switzerland.
<http://www.thedaylightsite.com/symposium.asp?tp=1064&y=2011>

General rights


Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

VELUX DAYLIGHT SYMPOSIUM 2011

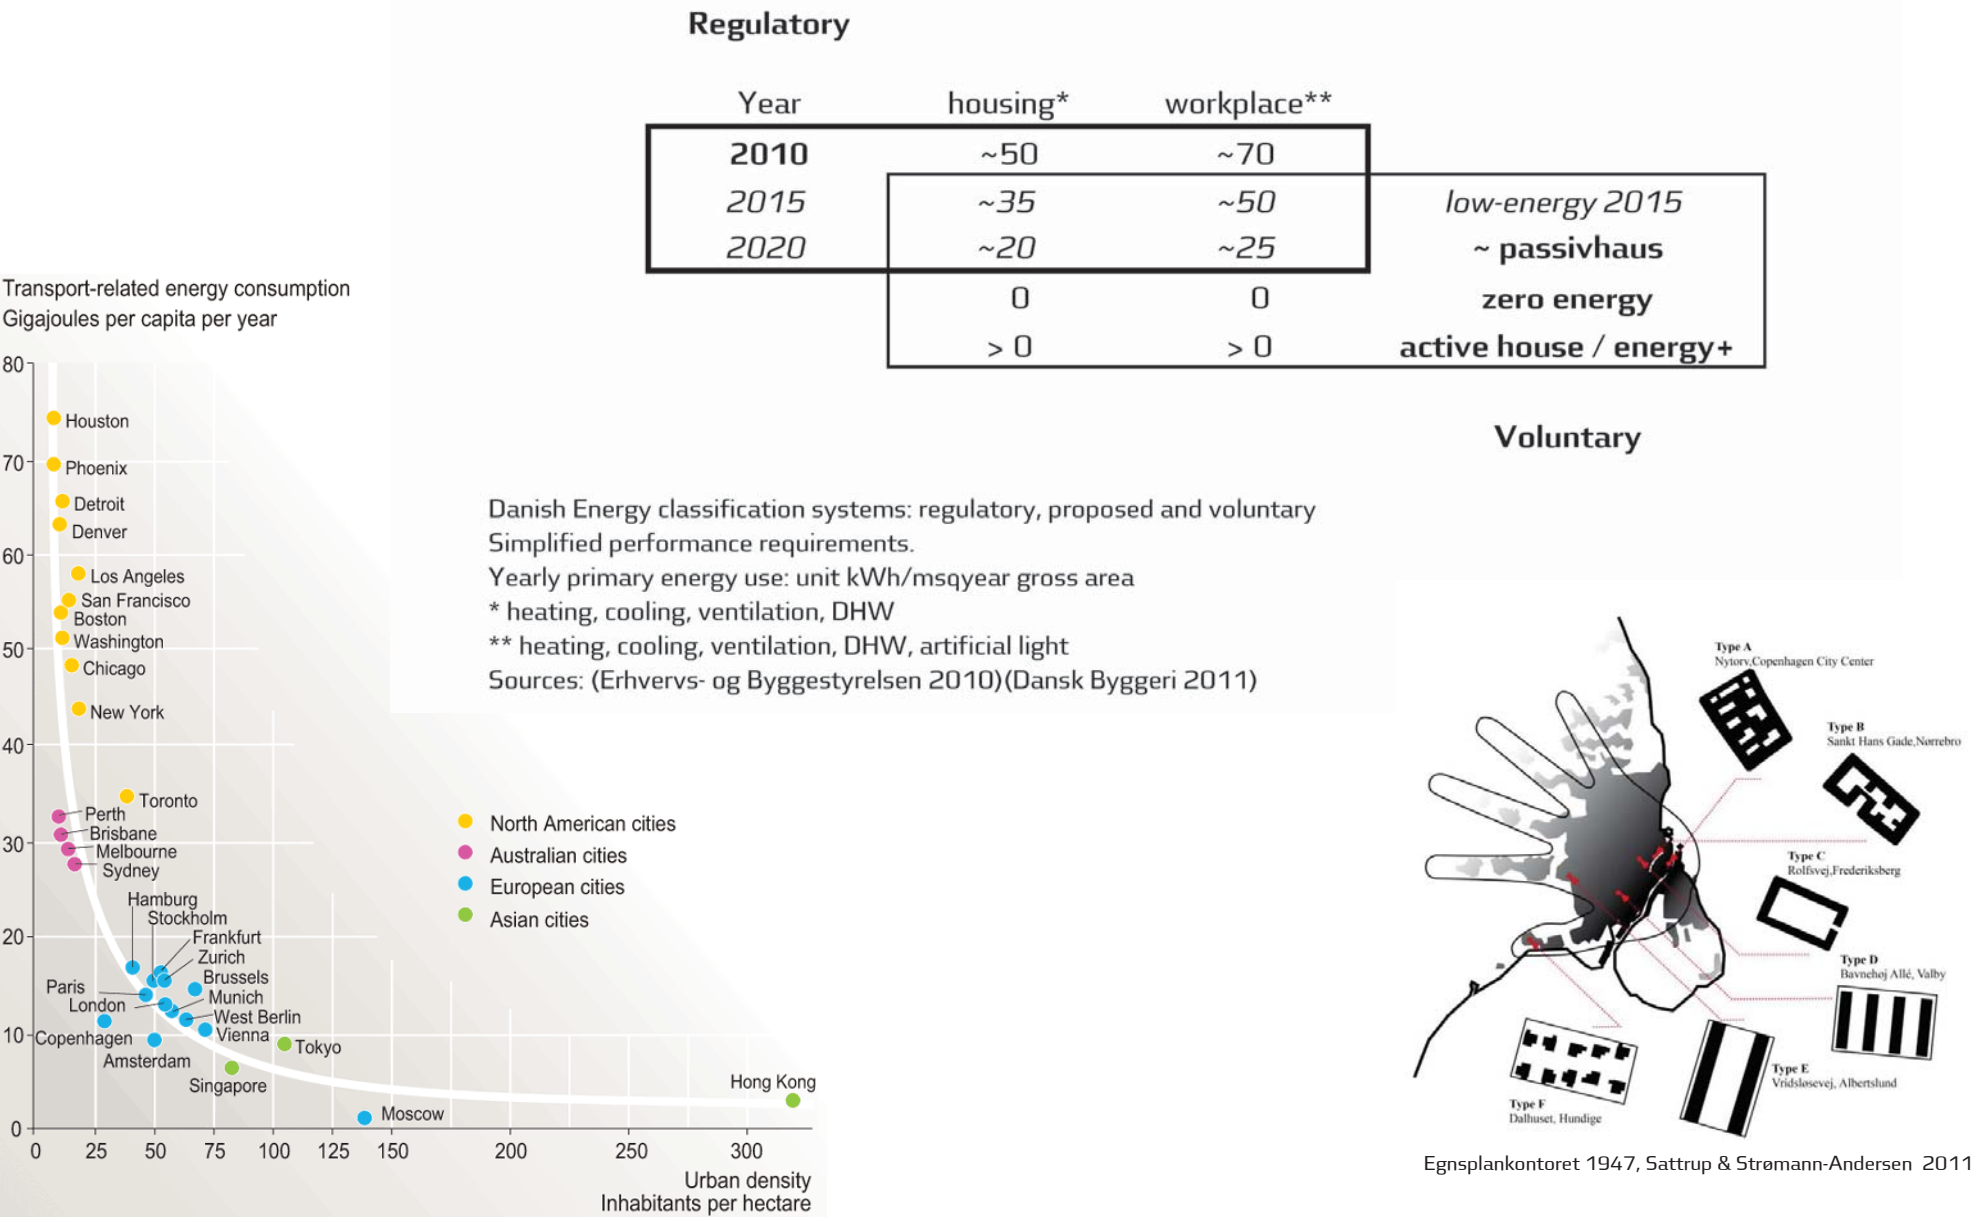


Hypothesis:

There is a hierarchical relationship between environmental performance and architectural scale. Design decisions taken at the biggest scale have the greatest impact. (Sattrup - Foster, Eberle, Schuler 2009)

This idea potentially connects embodied and operational energy concerns while lending itself to an incremental level of definition progress in the design process.

Is it true? Can it be identified? How would it be expressed?

To answer these questions, the impact of urban geometry and facade transparency on building energy use is investigated focusing on daylight and passive solar gains in a cool temperate climate using Copenhagen as the case.

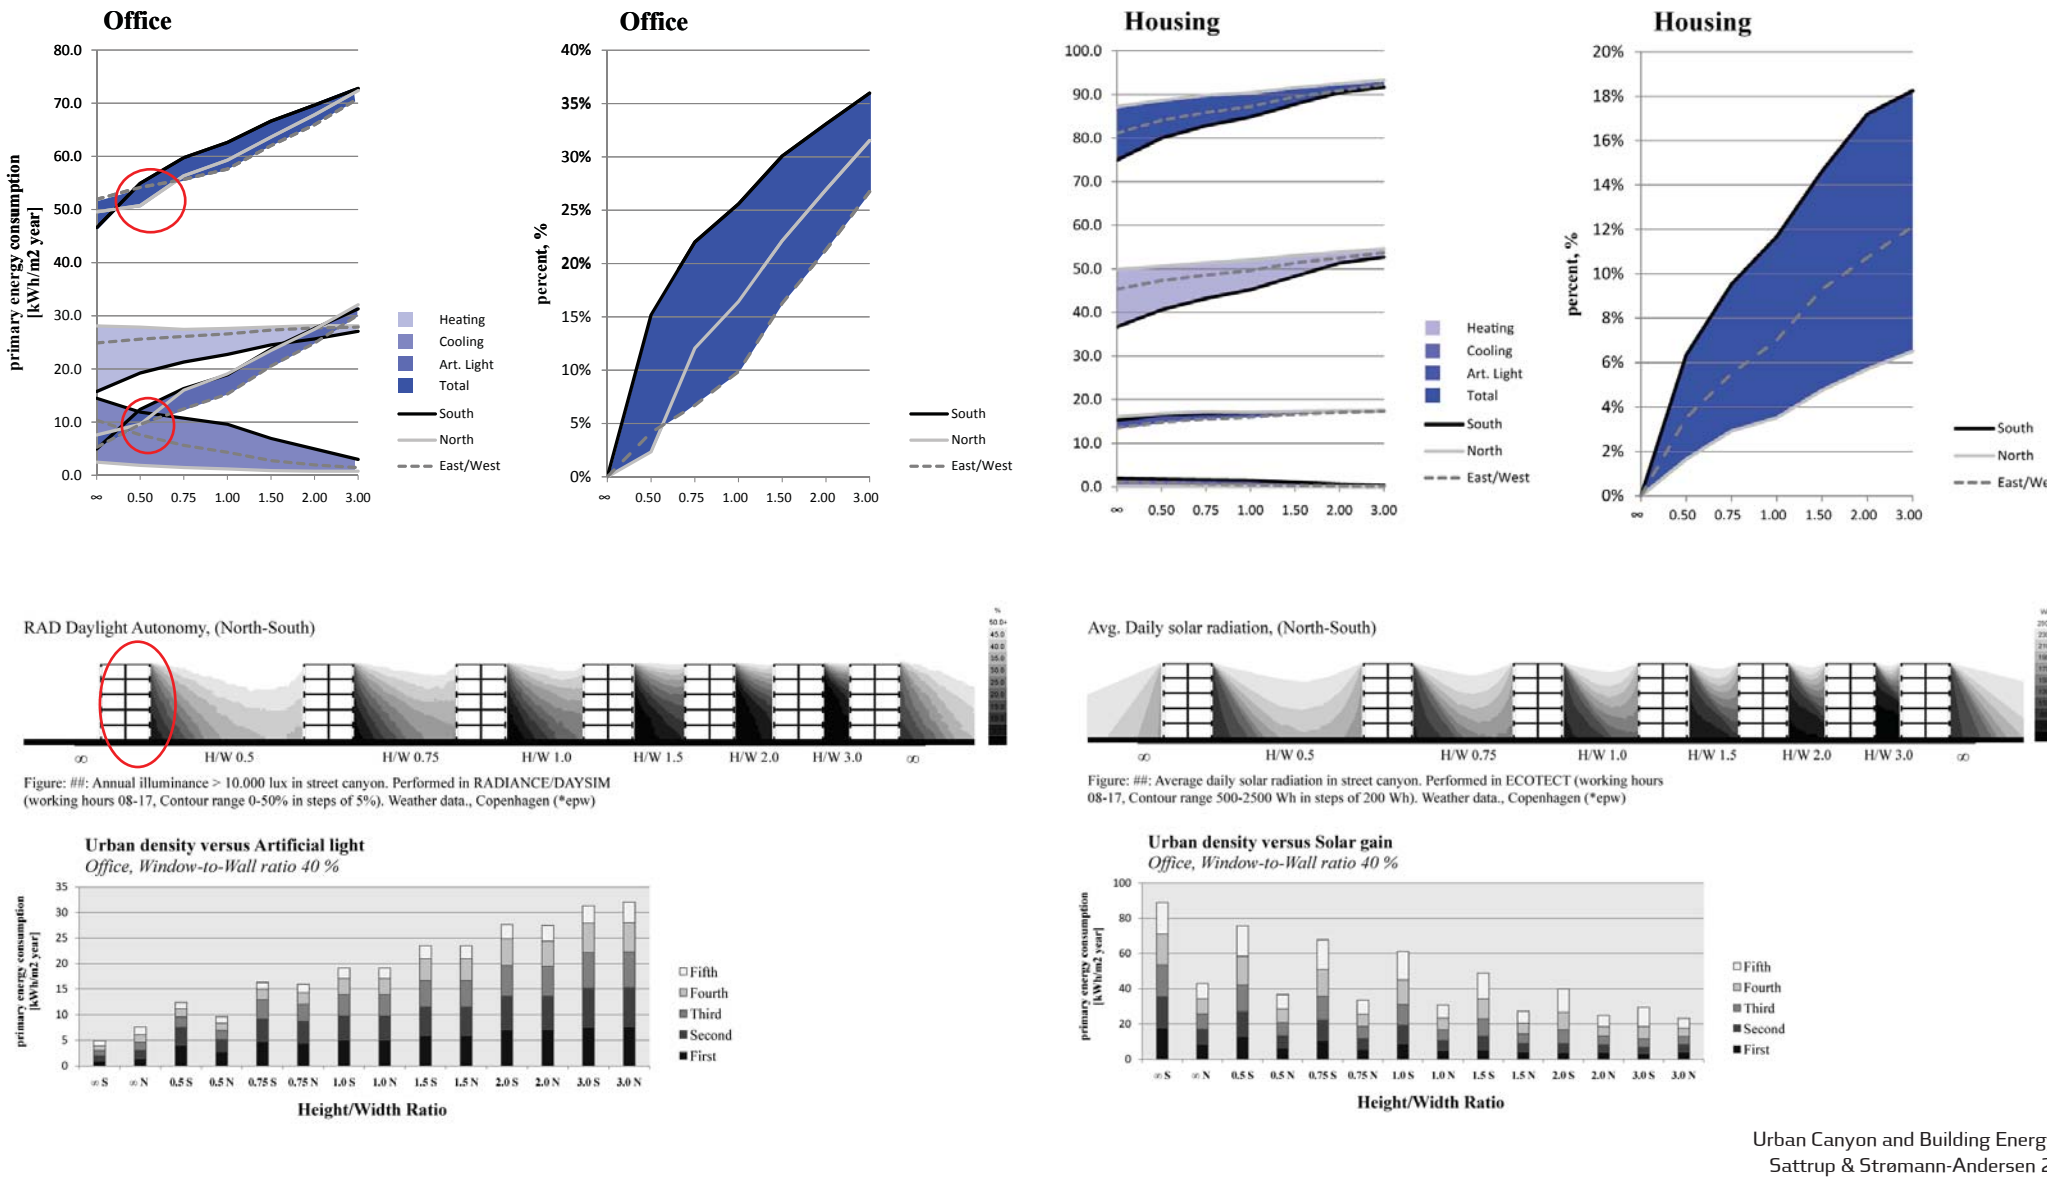

Urban Daylight Potential, Facade Transparency and Reflectivity


Analyzing the results above, an interesting detail can be noticed: The north side of an office building facing a wide urban space has less energy use for artificial lighting than its south facing equivalent. This effect is caused by direct sunlight reflected off the opposite facade and is related to the low sun of the cold season.

The reflectivity of the facade depends mainly on the colour and transparency of the materials and the glazing ratio. While glass may seem bright from below as it reflects the sky, its reflectivity is quite low.

As a result highly glazed facades are dark and reduce the urban daylight potential by ‘privatizing’ (Carpenter 2010) the daylight resource, leaving less for neighbouring buildings.

Bright facades can improve daylight autonomy considerably at the deepest levels of the urban canyon, decreasing the dependency on artificial lighting.

Facade mounted PV systems should also be considered in terms of their effect on the urban daylight potential.

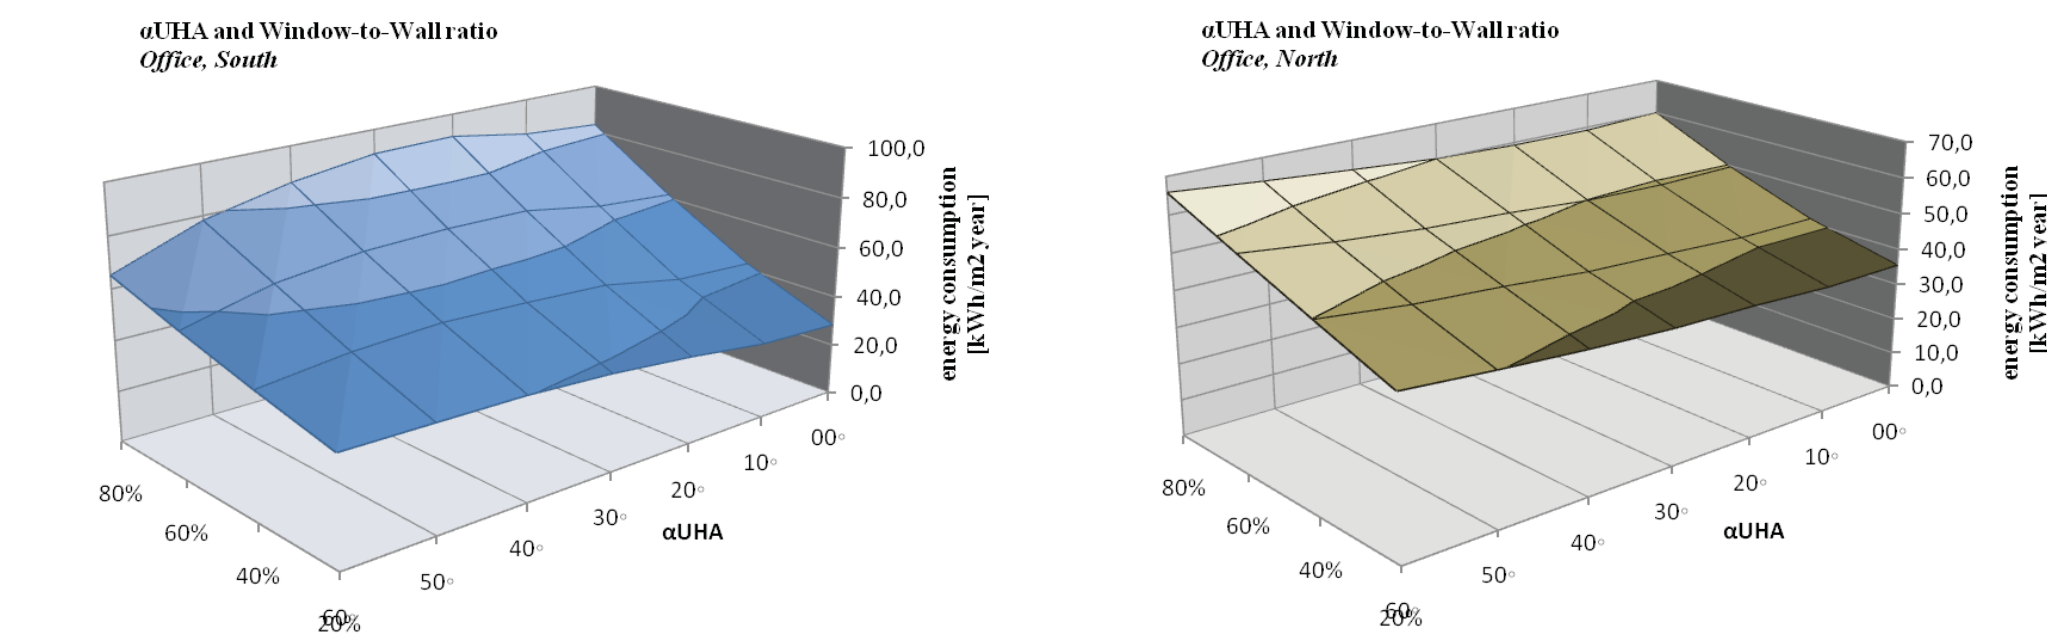

GOING LOW ENERGY - FULL SCALE

Peter Andreas Sattrup
Royal Danish Academy of Fine Arts School of Architecture

Jakob Strømmand Andersen
Technical University of Denmark - Henning Larsen Architects


Agenda:

As cities and buildings will need to change to a low-energy paradigm within the next decades to lessen fossil fuel dependency and mitigate climate change - what will be the consequences to architecture and planning of adopting low-energy building technology full scale?

Which design parameters have the greatest impacts on environmental performance and building energy use?

City sprawl and single family homes lead to high energy use. In current architecture and planning urban densification is seen as one of the key instruments to improve sustainability by reducing energy use for transport. In the future cities are likely to become more dense than now.

But how does densification affect building energy use?

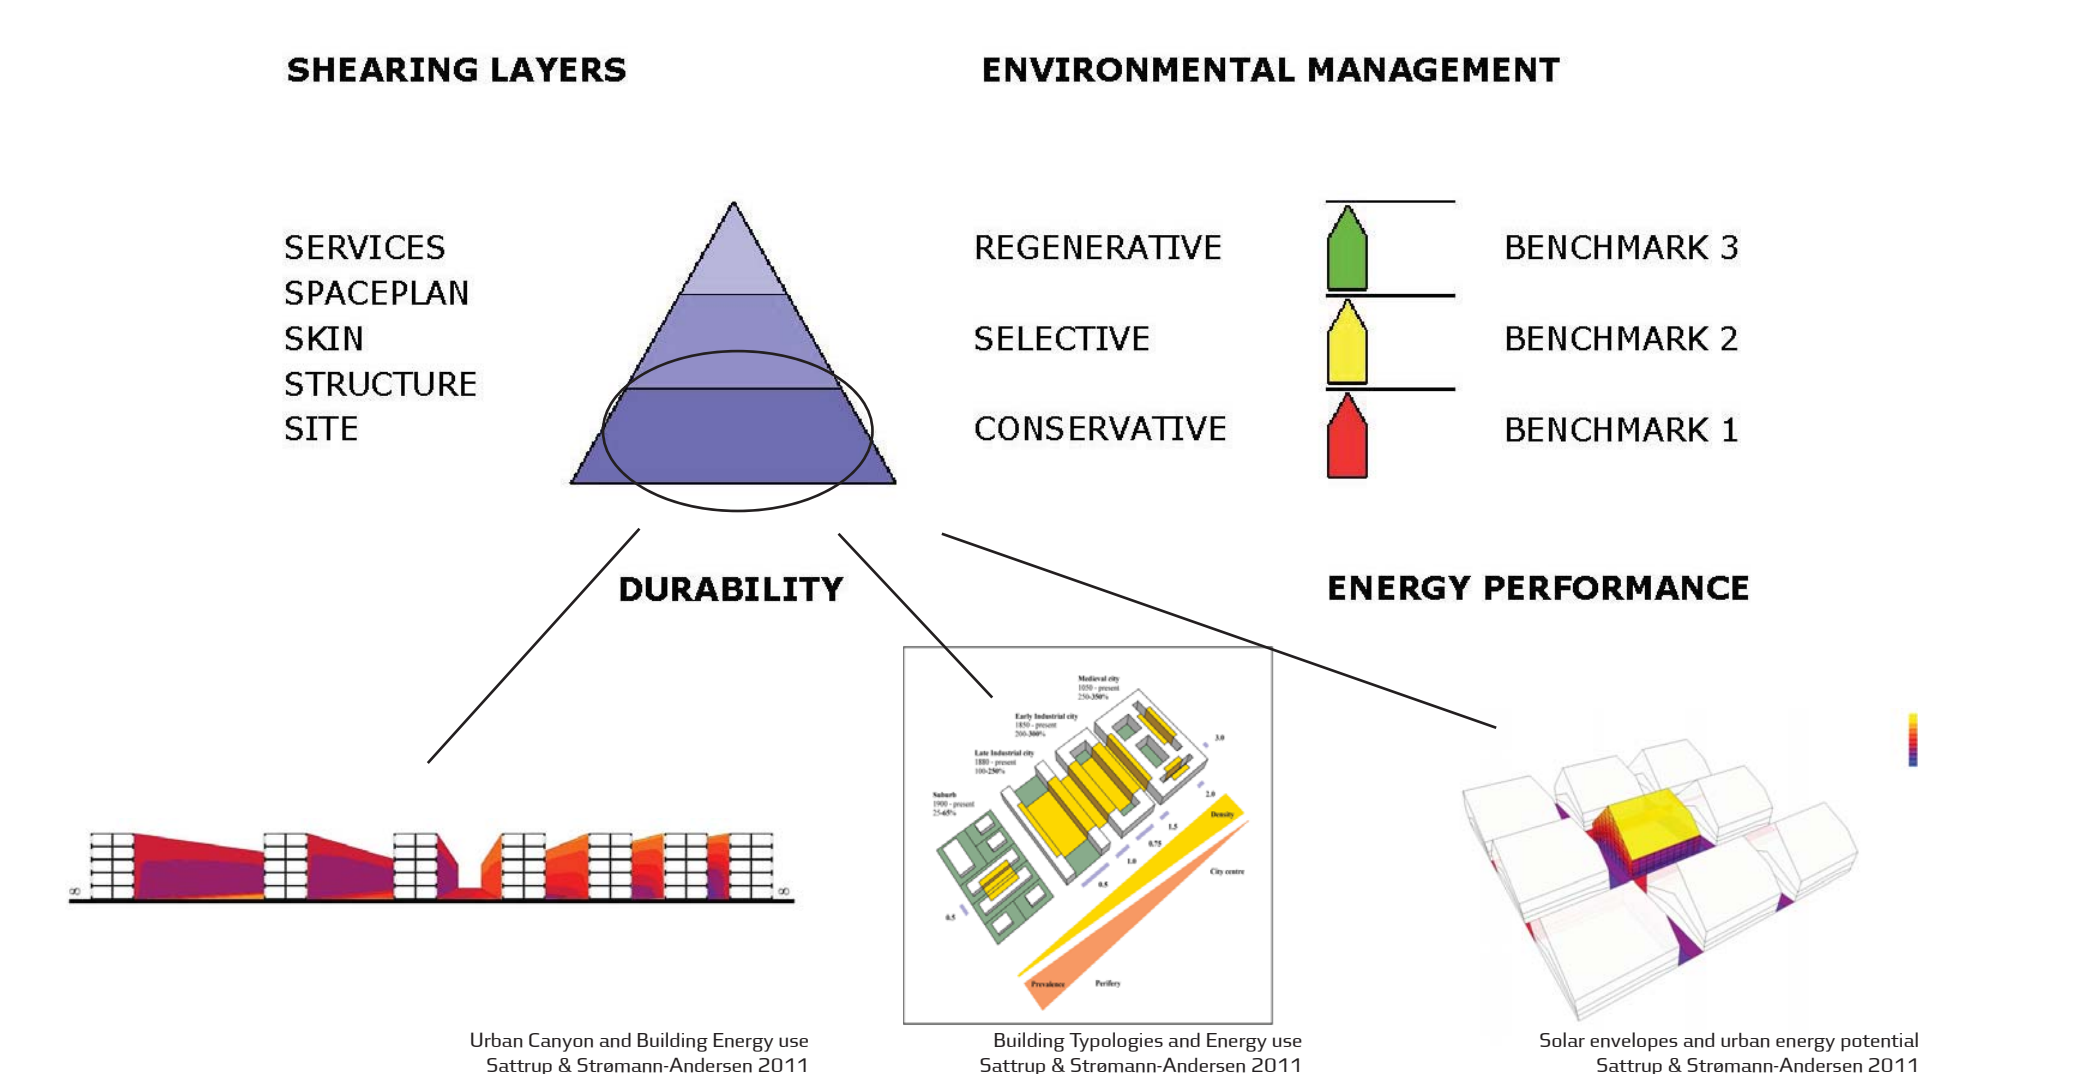


Urban Density and Building Energy use:

When low-energy building components are used, Daylight becomes a dominant energy theme, particularly in buildings that are occupied in the daytime.

Daylight is the design parameter most dynamically affected by increased urban density, and as the thermal performance of facade components is improved, energy used for artificial lighting may even become the single most important factor influencing primary energy use in high density cities.

Understanding the variations in energy use requires a holistic understanding of the socio-spatio-temporal relations between climate, building use, form, material and technology. Climate based simulation modelling is an essential tool in understanding these relations better.

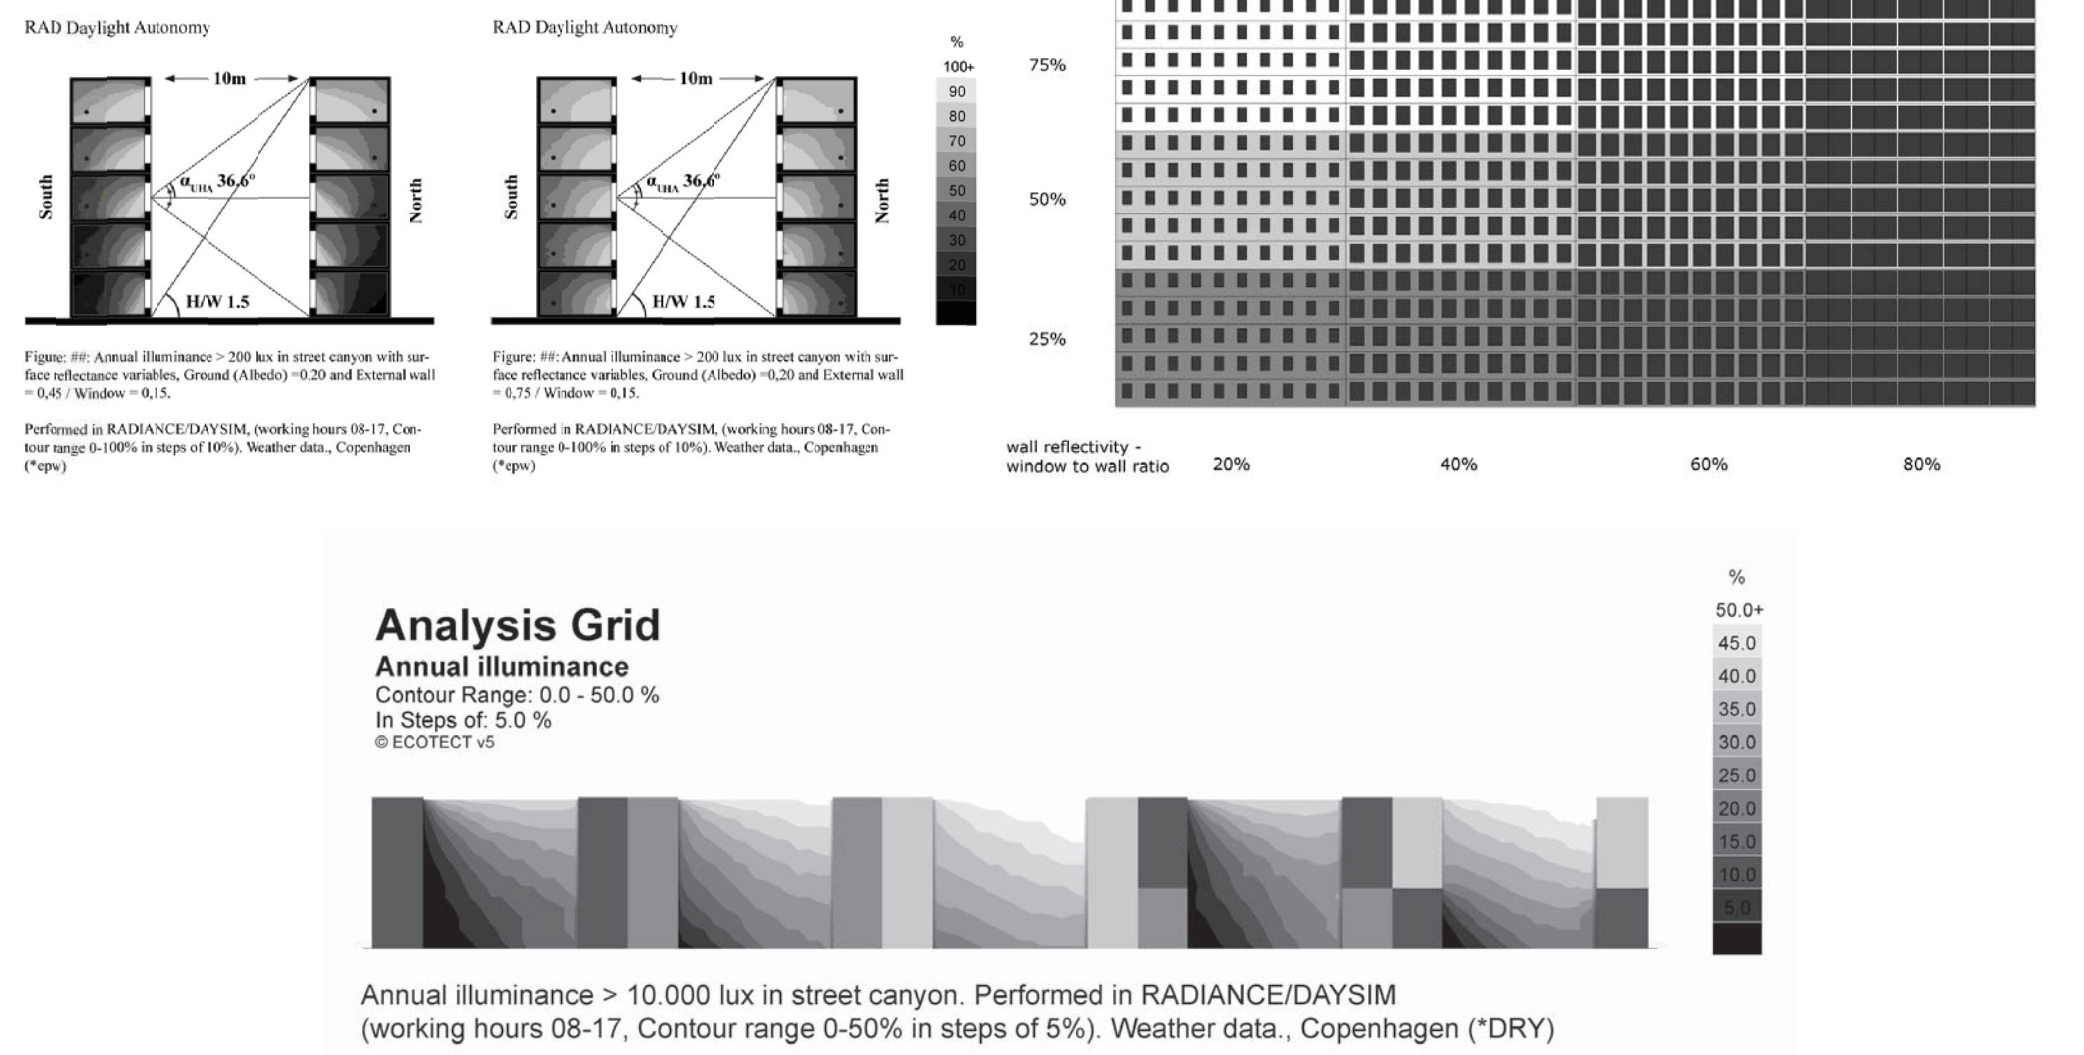

Glazing Ratios, Urban Density and Building Energy use:

Cross-referencing building energy use as a function of canyon height/width ratio and facade glazing, ratio it can be noted that while primary energy use increases with density up to 38% relative to unobstructed buildings, varying the glazing ratio is an altogether more powerful design parameter with variations up to 300%. It should be noted that in these studies energy use is a direct expression of the parameter variations as there is no dynamic shading systems in the model.

Returning to the initial question of whether a hierarchy of scale is present it can be seen that concerning operational energy, the building facade is the most influential scale. The interaction between design parameters is however highly dynamic affecting heating, cooling and daylighting. Highly glazed facades have the highest energy use and affect the urban daylight potential negatively.

The results suggest that there are limits to urban density, that the solar and daylight potential should be considered or indeed protected as a common resource.